



TUBE FURNACE UP TO 1350°C - FHA / FHC

The FHA, single zone, and FHC, 3-zone, tube furnaces can be used either vertically or horizontally and have a maximum operating temperature of 1350 °C.

The extensive F range of tube furnaces is offered with a wide range of accessories. The furnaces comprise ceramic fibre modules with a high quality 5 mm APM wire heating element mounted in the insulation, held in position by a ceramic holding ridge. The low thermal mass ceramic fibre insulation ensures low energy consumption and allows fast heating rates. The control thermocouple is a high grade type S thermocouple. Additionally, the tube furnace is available with up to 8 heating zones for the most precise temperature control and uniformity.

STANDARD FEATURES

- | 1350 °C maximum operating temperature
- | Programmable temperature controller with 24 segments: FHA fitted with EPC3016P1, FHC fitted with CC-T1
- | Over-temperature protection
- | Accepts work tubes with outer diameters up to 110 mm
- | Heated lengths of 200, 500, 750, 1000 or 1250 mm
- | Use in horizontal or vertical orientation
- | Exceptional lifetime and temperature stability
- | High grade type S thermocouple
- | Low thermal mass ceramic fibre insulation
- | High quality 5 mm APM wire as heating element
- | Furnace fitted with separate control box with 3 m cable, plug and socket
- | Ethernet communications

OPTIONS (*SPECIFY THESE AT TIME OF ORDER*)

- | A range of sophisticated digital controllers, multisegment programmers and data loggers with digital communication options is available - more information about controllers
- | Wide choice of tube diameters and materials is available: eg quartz, ceramic, metal
- | 'L' stand for vertical usage
- | Insulation plugs & radiation shields to prevent heat loss & improve uniformity
- | Modified atmosphere and vacuum assemblies are available - more information
- | Larger tube diameters on request
- | Vacuum packages with a choice of rotary vane pump or turbomolecular pump are available for furnaces with tube inner diameters of 60 mm and above
- | Oxygen sensor for inert gas packages
- | 6 m length of cable between furnace body and control box with plug and socket
- | Laboratory Gas Safety System for safe use with hydrogen above 750 °C

TUBE FURNACE UP TO 1350°C - FHA / FHC
MOUNTING CONFIGURATIONS



FURNACE BODY AND SEPARATE CONTROL BOX




OPTION: VERTICAL STAND

TUBE FURNACE UP TO 1350°C - FHA / FHC
TECHNICAL DETAILS

View inside of the tube furnace

1. outer case
2. end insulation
3. case insulation
4. heating elements
5. inner insulation (hot face)

The rectangular housing is constructed with slots for convection cooling of the outer housing. With insulation made from low thermal mass ceramic fibre material, the heat conduction is reduced to a minimum.

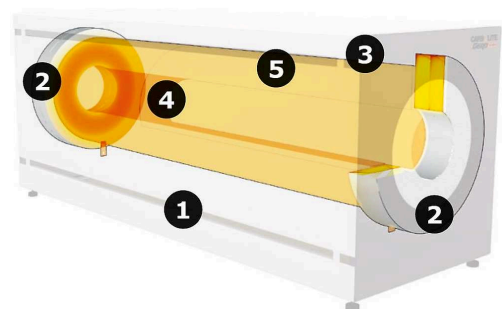

View inside

Inside the tube furnace, the heating element is constructed of vacuum formed fibres containing free radiating heating elements that are attached to the insulation by a ceramic holding ridge.

When compared to conventional heating methods, the 5 mm thick heating wires are combined with a low voltage, heavy-weight transformer power supply that provides an extraordinary long lifetime of the heating elements and temperature stability. The control thermocouple is a high grade type S thermocouple. Additionally, each tube furnace model is available with up to 8 heating zones for the most precise temperature control and uniformity.

TUBE FURNACE UP TO 1350°C - FHA / FHC

TECHNICAL DATA

	FHA 13/32/200	FHA 13/32/500	FHA 13/50/200
Number of heated zones	1	1	1
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	32	32	50
Heated length (mm)	200	500	200
Furnace dimensions H x W x D (mm)	420 x 400 x 350	420 x 700 x 350	420 x 400 x 350
Furnace weight (kg)	25	30	30
Tube length for use in air (mm)	390	690	390
Tube length for use with modified atmosphere (mm)	925	1225	925
Control module dimensions H x W x D (mm)	500 x 550 x 700	500 x 550 x 700	500 x 550 x 700
Control module weight (kg)	50	50	50
Uniform length ±5°C (mm)	100	250	100
Power (kW)	1.2	2.4	1.5

	FHA 13/50/500	FHA 13/50/750	FHA 13/80/200
Number of heated zones	1	1	1
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	50	50	80
Heated length (mm)	500	750	200
Furnace dimensions H x W x D (mm)	420 x 700 x 350	420 x 950 x 350	420 x 400 x 350
Furnace weight (kg)	35	40	35
Tube length for use in air (mm)	690	940	390
Tube length for use with modified atmosphere (mm)	1225	1475	925
Control module dimensions H x W x D (mm)	500 x 550 x 700	850 x 550 x 700	500 x 550 x 700
Control module weight (kg)	50	60	50
Uniform length ±5°C (mm)	250	375	100
Power (kW)	3.6	5.4	2.1

	FHA 13/80/500	FHA 13/80/750	FHA 13/80/1000
Number of heated zones	1	1	1
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	80	80	80
Heated length (mm)	500	750	1000
Furnace dimensions H x W x D (mm)	420 x 700 x 350	420 x 950 x 350	420 x 1200 x 350
Furnace weight (kg)	40	50	80
Tube length for use in air (mm)	690	940	1190
Tube length for use with modified atmosphere (mm)	1225	1475	1725
Control module dimensions H x W x D (mm)	500 x 550 x 700	850 x 550 x 700	850 x 550 x 700
Control module weight (kg)	60	70	90
Uniform length ±5°C (mm)	200	375	500
Power (kW)	5.2	7.8	10.4

	FHA 13/110/500	FHA 13/110/750	FHA 13/110/1000
Number of heated zones	1	1	1
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	110	110	110
Heated length (mm)	500	750	1000
Furnace dimensions H x W x D (mm)	590 x 700 x 520	590 x 950 x 520	590 x 1200 x 520
Furnace weight (kg)	55	70	100
Tube length for use in air (mm)	690	940	1190
Tube length for use with modified atmosphere (mm)	1225	1475	1725
Control module dimensions H x W x D (mm)	850 x 550 x 700	850 x 550 x 700	1100 x 1200 x 700
Control module weight (kg)	70	90	90
Uniform length ±5°C (mm)	250	375	500
Power (kW)	7.8	11.5	16.0

	FHA 13/110/1250	FHC 13/32/500	FHC 13/50/500
Number of heated zones	1	3	3
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	110	32	50
Heated length (mm)	1250	500	500
Furnace dimensions H x W x D (mm)	590 x 1450 x 520	420 x 700 x 350	420 x 700 x 350
Furnace weight (kg)	130	30	35
Tube length for use in air (mm)	1440	690	690
Tube length for use with modified atmosphere (mm)	1975	1225	1225
Control module dimensions H x W x D (mm)	1100 x 1200 x 700	500 x 550 x 700	500 x 550 x 700
Control module weight (kg)	90	50	50
Uniform length ±5°C (mm)	610	350	350
Power (kW)	20.0	2.4	3.6

	FHC 13/50/750	FHC 13/80/500	FHC 13/80/750
Number of heated zones	3	3	3
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	50	80	80
Heated length (mm)	750	500	750
Furnace dimensions H x W x D (mm)	420 x 950 x 350	420 x 700 x 350	420 x 950 x 350
Furnace weight (kg)	40	40	50
Tube length for use in air (mm)	940	690	940
Tube length for use with modified atmosphere (mm)	1475	1225	1475
Control module dimensions H x W x D (mm)	850 x 550 x 700	500 x 550 x 700	850 x 550 x 700
Control module weight (kg)	60	60	70
Uniform length ±5°C (mm)	550	350	550
Power (kW)	5.4	5.2	7.8

	FHC 13/80/1000	FHC 13/110/500	FHC 13/110/750
Number of heated zones	3	3	3
Max temp (°C)	1350	1350	1350
Furnace Ø (mm)	80	110	110
Heated length (mm)	1000	500	750
Furnace dimensions H x W x D (mm)	420 x 1200 x 350	590 x 700 x 520	590 x 950 x 520
Furnace weight (kg)	80	55	70
Tube length for use in air (mm)	1190	690	940
Tube length for use with modified atmosphere (mm)	1725	1225	1475
Control module dimensions H x W x D (mm)	850 x 550 x 700	850 x 550 x 700	850 x 550 x 700
Control module weight (kg)	90	70	90
Uniform length ±5°C (mm)	800	300	500
Power (kW)	10.4	7.8	11.5

	FHC 13/110/1000	FHC 13/110/1250
Number of heated zones	3	3
Max temp (°C)	1350	1350
Furnace Ø (mm)	110	110
Heated length (mm)	1000	1250
Furnace dimensions H x W x D (mm)	590 x 1200 x 520	590 x 1450 x 520
Furnace weight (kg)	100	130
Tube length for use in air (mm)	1190	1440
Tube length for use with modified atmosphere (mm)	1725	1975
Control module dimensions H x W x D (mm)	1100 x 1200 x 700	1100 x 1200 x 700
Control module weight (kg)	90	90
Uniform length ±5°C (mm)	750	950
Power (kW)	16.0	20.0

Please note

- Heat up rate when using a ceramic work tube must be limited to 5 °C/min
- Further to the depth of the control module 150 mm for the power plugs and other plugs need to be added
- Minimum uniform length in horizontal furnace with insulation plugs fitted at 100 °C below max. temperature
- Power supply: a = 3 phase 380 - 415 V / b = 3 phase 480 V / c = 3 phase 200 - 210 V / d = 3 phase 220 - 240 V / e = 1 phase 220 - 240 V

www.carbolite.com/fha